Apartment

Sample Client

8 Example Court, Apartment 4B, Sampleton, CA 90000, US

DRAWING AV-400 · PROJECT RM-2026-042 · REVISION A · ISSUED 2026-07-18

INTEGRATOR

Example Integration Co.

SIGN-OFF

DRAWN RackPal · CHECKED — · APPROVED —

DRAWING INDEX

1	T0.00	COVER AND DRAWING INDEX
2	T0.01	SYMBOL LEGEND
3	T0.02	EXCEPTIONS AND ACKNOWLEDGEMENTS
4	T2.01	RACK ELEVATION — FRONT · RK-1
5	T2.02	RACK ELEVATION — REAR · RK-1
6	T6.10	PULL SHEET
7	T6.15	TERMINATION SCHEDULE
8	T6.30	EQUIPMENT LIST AND MATERIALS

RACKS

RACK	SIZE	DEVICES	RU USED	WEIGHT	POWER	HEAT
RK-1 Hall Cupboard Rack	9U	5	F 7 · R 5	60.1 lb	≥ 489 VA (1 unknown)	≥ 1587 BTU/hr (1 unknown)

REV	DATE	DESCRIPTION	BY
A	2026-05-12	Issued for install	RackPal

Apartment

8 Example Court, Apartment 4B, Sampleton, CA 90000, US

CLIENT Sample Client

COVER AND DRAWING INDEX

DRAWN	RackPal	SCALE	NTS	SIZE	B	DATE	2026-07-18	REV	A
CHK'D	—	PROJ	RM-2026-042	DISC	T	FILE	apartment.rppj	SHEET	1/8

Example Integration Co.

SYMBOL LEGEND: SEE SHEET T0.01

CABLE TYPES

Colour marks the signal domain, not the cable type: no palette stays distinguishable to colour-blind readers past about eight hues.
Dash, weight, mark and tag carry the type, so every type below still reads in greyscale (AC-054).

TYPE	FAMILY	IN COLOUR	IN GREYSCALE
Analog RCA	Line level, unbalanced (RCA)	● AUD·AUD	● AUD·AUD
HDMI	HDMI 2.0 (18 Gbps)	▲ VID·HD20	▲ VID·HD20
	HDMI 2.1 (48 Gbps)	▲ VID·HD21	▲ VID·HD21
	HDMI 1.4	▲ VID·HD14	▲ VID·HD14
Network	Ethernet (copper)	■ NET·NET	■ NET·NET
	PoE / PoE+ / PoE++	■ NET·PoE	■ NET·PoE
IR	IR emitter (flasher)	✚ CTL·IR	✚ CTL·IR
	IR receiver (powered eye)	✚ CTL·IRRX	✚ CTL·IRRX
	IR direct (device input)	✚ CTL·IRD	✚ CTL·IRD
RS-232	RS-232	✚ CTL·232	✚ CTL·232
RG6	RF / CATV distribution	▽ RF·RF	▽ RF·RF
	Satellite / SWM	▽ RF·SAT	▽ RF·SAT
	OTA antenna	▽ RF·OTA	▽ RF·OTA
S/PDIF	S/PDIF, coaxial (75 Ω)	◆ DIG·SPD	◆ DIG·SPD
TOSLINK	TOSLINK (optical S/PDIF)	◇ DIG·OPT	◇ DIG·OPT
Speaker level	Speaker level, low-Z	◖ AUD·SPK	◖ AUD·SPK
	Speaker, constant-voltage 70 / 100 / 25 V	○ AUD·70V	○ AUD·70V
Power	AC branch circuit	⬢ PWR·PWR	⬢ PWR·PWR
	IEC device power (C13/C14, C19/C20)	⬢ PWR·IEC	⬢ PWR·IEC

SYMBOLS

- Matrix switch
- Patch panel
- Blank or vent
- Switcher
- Power

DEVICE BLOCK



An example block, not a device in this project.

CONVENTIONS

- Border: NEW
- Hatched: a blank, vent or shelf
- 2U · 3–4 — Height, and the RUs a device occupies
- 176.6 lb — Load gutter: weight carried from this RU up

IDENTIFIERS

Device	{TYPE_PREFIX}{SEP}{SEQ} → AMP-1
	TYPE_PREFIX = AMP, prefix of the device type
	SEP = -, separator
	SEQ = 1, sequence number
Port	J{PORT_SEQ:2} → J03
	PORT_SEQ = 3, port sequence on the device
Cable	W{SEQ:3} → W001
	SEQ = 1, sequence number
Outlet, field end	{ROOM_ABBR}-{SERVICE}-{SEQ} → LR-TV-1
	ROOM_ABBR = LR, room abbreviation
	SERVICE = TV, service at the outlet
	SEQ = 1, sequence number
Outlet, rack end	{FLOOR}{SPACE}-{PANEL}{PORT:2} → 1A-A12
	FLOOR = 1, floor
	SPACE = A, space on the floor
	PANEL = A, patch panel letter
	PORT = 12, panel port number

ABBREVIATIONS AND NOTES

RU	rack unit, 1.75 in
NTS	not to scale
REV	revision
CHK'D	checked by
DISC	discipline
PROJ	project number
AUD	Analog Audio (a tag prefix)
CTL	Control (a tag prefix)
DIG	Digital Audio (a tag prefix)
NET	Network (a tag prefix)
PWR	Power (a tag prefix)
RF	Analog Video & RF (a tag prefix)
STR	Structure (a tag prefix)
VID	Digital Video (a tag prefix)

Do not scale a sheet marked NTS.

A value shown as — is not known, and was not guessed.

REV	DATE	DESCRIPTION	BY
A	2026-05-12	Issued for install	RackPal

Apartment

8 Example Court, Apartment 4B, Sampleton, CA 90000, US

CLIENT Sample Client

SYMBOL LEGEND

DRAWN	RackPal	SCALE	NTS	SIZE	B	DATE	2026-07-18	REV	A
CHK'D	—	PROJ	RM-2026-042	DISC	T	FILE	apartment.rppj	SHEET	2/8

Example Integration Co.

PROJECT-WIDE EXCEPTIONS (0)

RULE	CHANGE	REASON	BY	DATE
None. Every rule runs at its catalogue severity, and none is muted.				

OPEN FINDINGS (2)

SEVERITY	RULE	LOCUS	MESSAGE
WARNING (2)			
WARNING	RCK-013	SEQ-1	SEQ-1 is 8.2 kg on front ears rated to 7.0 kg. It needs rear rail support or a shelf in RK-1, and may require adjustment of the rack ears.
WARNING	RCK-013	SW-1	SW-1 is 7.7 kg on front ears rated to 7.0 kg. It needs rear rail support or a shelf in RK-1, and may require adjustment of the rack ears.

ACKNOWLEDGED FINDINGS (0)

SEVERITY	RULE	LOCUS	MESSAGE	REASON	BY	DATE
None.						

REV	DATE	DESCRIPTION	BY
A	2026-05-12	Issued for install	RackPal

Apartment

8 Example Court, Apartment 4B, Sampleton, CA 90000, US

CLIENT Sample Client

EXCEPTIONS AND ACKNOWLEDGEMENTS

DRAWN	RackPal	SCALE	NTS	SIZE	B	DATE	2026-07-18	REV	A
CHK'D	—	PROJ	RM-2026-042	DISC	T	FILE	apartment.rppj	SHEET	3/8

Example Integration Co.

SYMBOL LEGEND: SEE SHEET T0.01

SCALE APPLIES TO THE MOUNTING PANEL. RULER AND GUTTER ARE ANNOTATION.

RACK TOTAL 60.1 lb
CAPACITY 198.4 lb
DRAW ≥ 489 VA (1 unknown)
HEAT ≥ 1587 BTU/hr (1 unknown)

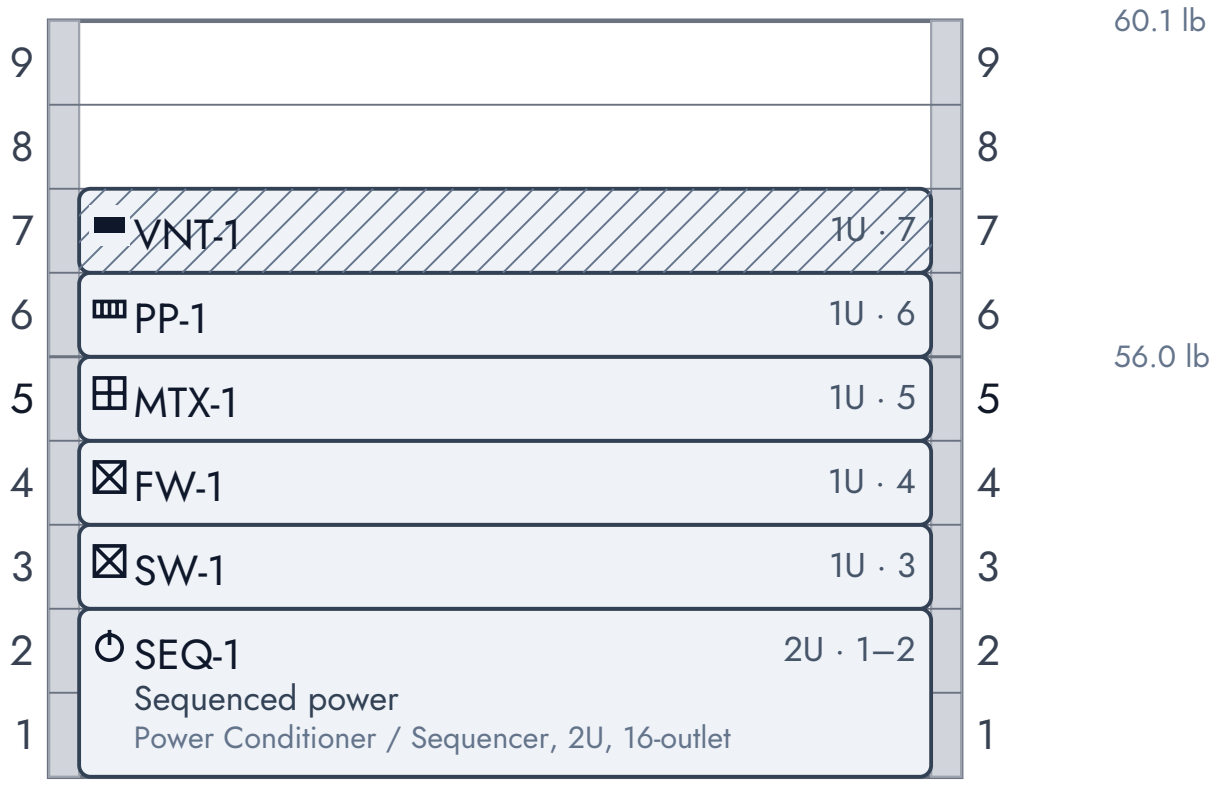

REV	DATE	DESCRIPTION	BY
A	2026-05-12	Issued for install	RackPal

Apartment — RK-1 Hall Cupboard Rack

8 Example Court, Apartment 4B, Sampleton, CA 90000, US

CLIENT Sample Client

RACK ELEVATION — FRONT

RK-1 · Hall Cupboard Rack · 9U

DRAWN	RackPal	SCALE	1:4	SIZE	B	DATE	2026-07-18	REV	A
CHK'D	—	PROJ	RM-2026-042	DISC	T	FILE	apartment.rppj	SHEET	4/8

Example Integration Co.

SYMBOL LEGEND: SEE SHEET T0.01

SHEET 4 OF 8 · RACK ELEVATION — FRONT

SHEET NO. T2.01

REAR FACES SHOWN. PORT AND CONNECTION DETAIL: SEE T6.15.
REAR VIEW — MIRRORED
SCALE APPLIES TO THE MOUNTING PANEL. RULER AND GUTTER ARE ANNOTATION.

RACK TOTAL 60.1 lb
CAPACITY 198.4 lb
DRAW ≥ 489 VA (1 unknown)
HEAT ≥ 1587 BTU/hr (1 unknown)
NOT DRAWN HERE 2 OF 6 — 2 ON FRONT

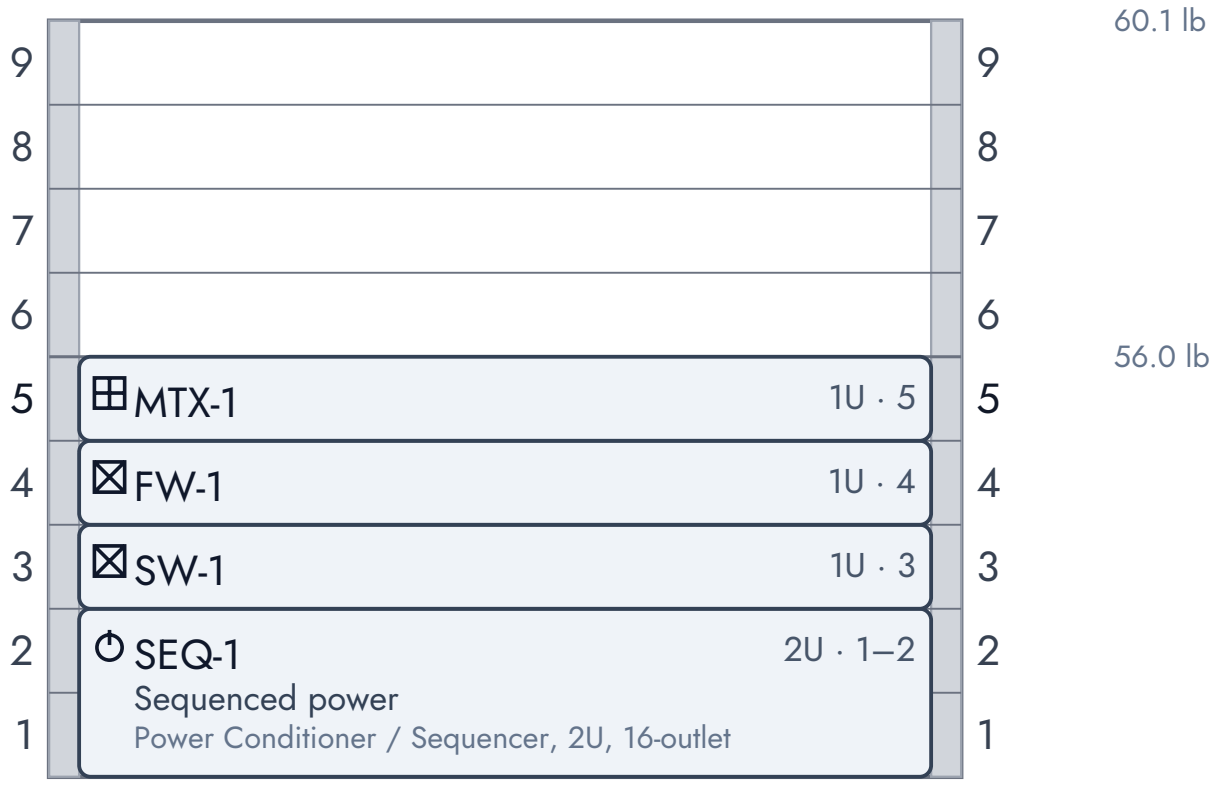

REV	DATE	DESCRIPTION	BY
A	2026-05-12	Issued for install	RackPal

Apartment — RK-1 Hall Cupboard Rack
8 Example Court, Apartment 4B, Sampleton, CA 90000, US
CLIENT Sample Client

RACK ELEVATION — REAR
RK-1 · Hall Cupboard Rack · 9U

DRAWN	RackPal	SCALE	1:4	SIZE	B	DATE	2026-07-18	REV	A
CHK'D	—	PROJ	RM-2026-042	DISC	T	FILE	apartment.rppj	SHEET	5/8

Example Integration Co.
SYMBOL LEGEND: SEE SHEET T0.01
SHEET 5 OF 8 · RACK ELEVATION — REAR
SHEET NO. T2.02

PULL SHEET (0 runs)

CABLE ID	TYPE	FIELD LABEL	RACK LABEL	FROM — ROOM / OUTLET	TO — RACK / RU / FACE	MEDIA	LEN	PATHW…	SIGN-OFF

This project has no cables yet.

TERMINATION SCHEDULE (0 runs)

CABLE ID	TYPE	RACK LABEL	FIELD LABEL	RACK / RU / FACE	DEVICE	PORT	FAR END	FAR PORT	MEDIA	FIELD TERM	RACK TERM	CONDUCT... / NOTES

This project has no cables yet.

EQUIPMENT AND RACK MATERIALS. CABLE SCHEDULES: SEE T6.10 AND T6.15. POWER SCHEDULE NOT ISSUED IN THIS SET. 5 DEVICES NOT IN A RACK.

QTY	DESIGNATOR	MANUFACTURER	MODEL	DESCRIPTION	RU	RACK	LOCATION	FACE	MASS (LB)	DRAW (VA)	LIFECYCLE	NOTES
RK-1 · Hall Cupboard Rack · 9U												
1	PP-1	Generic	PP-24	Patch panel	1U · 6	RK-1	Hall Cupboard	FRONT	3.1	—	NEW	
1	MTX-1	Generic	MTX-4X4-HDMI	HDMI matrix	1U · 5	RK-1	Hall Cupboard	FRONT	11.9	19	NEW	
1	FW-1	Generic	FW-RTR-1	Router / firewall	1U · 4	RK-1	Hall Cupboard	FRONT	9.0	58	NEW	
1	SW-1	Generic	SW-48-POE	PoE switch	1U · 3	RK-1	Hall Cupboard	FRONT	17.0	400	NEW	
1	SEQ-1	Generic	SEQ-2U-16	Sequenced power	2U · 1–2	RK-1	Hall Cupboard	FRONT	18.1	12	NEW	
								RK-1 SUBTOTAL	5 DEVICES + 1 PASSIVE (SEE MATERIALS)		60.1 lb	≥ 489 VA (1 unknown)
NOT IN A RACK												
1	DISP-1	Generic	DISP-1	Living room display	—	—	Living Room	NONE	39.9	126	NEW	
1	DISP-2	Generic	DISP-1	Bedroom display	—	—	Bedroom	NONE	39.9	126	NEW	
1	SPK-1	Generic	SPK-CEIL-PAIR	Living room ceiling pair	—	—	Living Room	NONE	6.0	—	NEW	
1	AP-1	Generic	AP-1	Hall access point	—	—	Hall Cupboard	NONE	2.0	—	NEW	
1	ONT-1	Generic	ONT-1	Building fibre handoff	—	—	Hall Cupboard	NONE	2.4	—	NEW	
								NOT IN A RACK SUBTOTAL	5 DEVICES		90.2 lb	≥ 252 VA (3 unknown)
MATERIALS												
1		Generic	VNT-1U	Vent Panel, 1U, 64% open	RK-1 × 1				1.0	0	NEW	

CABLE FOOTAGE BY MEDIA

MEDIA	RUNS	ESTIMATED	LENGTH UNKNOWN	FOOTAGE	WITH WASTE (+10%)
NO FIELD CABLE IN THIS PROJECT.					

HARDWARE IMPLIED BY THE RULES

QTY	ITEM	FOR	RACK	RULE	NOTES
1	Rear rail support	SEQ-1	RK-1	RCK-013	
1	Rear rail support	SW-1	RK-1	RCK-013	

JUMPERS AND POWER CORDS

QTY	MEDIA	LENGTH	COLOUR	NOTES
NO JUMPERS OR POWER CORDS IN THIS PROJECT.				

IN-LINE ADAPTERS

QTY	ADAPTER	MODEL
NO IN-LINE ADAPTER IS DECLARED.		

OUTLET MAP

PROVIDER	OUTLET	DEVICE	INLET	CORD	RACK
NO CORD IS DRAWN TO AN OUTLET.					

SEQ-1: 0 of 16 outlets assigned, 16 free.

8 devices have no cord drawn and are counted as one outlet per inlet.