Small Office

Sample Tenant Co.

400 Example Boulevard, Suite 210, Sampleton, CA 90000, US

DRAWING AV-300 · PROJECT RM-2026-031 · REVISION A · ISSUED 2026-07-18

INTEGRATOR

Example Integration Co.

SIGN-OFF

DRAWN RackPal · CHECKED — · APPROVED —

DRAWING INDEX

1	T0.00	COVER AND DRAWING INDEX
2	T0.01	SYMBOL LEGEND
3	T0.02	EXCEPTIONS AND ACKNOWLEDGEMENTS
4	T2.01	RACK ELEVATION — FRONT · RK-1
5	T2.02	RACK ELEVATION — REAR · RK-1
6	T2.03	RACK ELEVATION — FRONT · RK-2
7	T2.04	RACK ELEVATION — REAR · RK-2
8	T6.10	PULL SHEET
9	T6.15	TERMINATION SCHEDULE
10–11	T6.30–T6.31	EQUIPMENT LIST AND MATERIALS (2 pages)

RACKS

RACK	SIZE	DEVICES	RU USED	WEIGHT	POWER	HEAT
RK-1 Server Room Rack	18U	13	F 16 · R 10	140.3 lb	≥ 1436 VA (3 unknown)	≥ 4211 BTU/hr (2 unknown)
RK-2 Reception Wall Box	6U	3	F 5 · R 3	39.1 lb	≥ 412 VA (1 unknown)	≥ 1338 BTU/hr (1 unknown)

REV	DATE	DESCRIPTION	BY
A	2026-05-06	Issued for construction	RackPal

Small Office

400 Example Boulevard, Suite 210, Sampleton, CA 90000, US

CLIENT Sample Tenant Co.

COVER AND DRAWING INDEX

DRAWN	RackPal	SCALE	NTS	SIZE	B	DATE	2026-07-18	REV	A
CHK'D	—	PROJ	RM-2026-031	DISC	T	FILE	small_office.rppj	SHEET	T0.00

Example Integration Co.

SYMBOL LEGEND: SEE SHEET T0.01

CABLE TYPES

Colour marks the signal domain, not the cable type: no palette stays distinguishable to colour-blind readers past about eight hues.
Dash, weight, mark and tag carry the type, so every type below still reads in greyscale (AC-054).

TYPE	FAMILY	IN COLOUR	IN GREYSCALE
Analog RCA	Line level, unbalanced (RCA)	● AUD·AUD	● AUD·AUD
HDMI	HDMI 2.0 (18 Gbps)	▲ VID·HD20	▲ VID·HD20
	HDMI 2.1 (48 Gbps)	▲ VID·HD21	▲ VID·HD21
	HDMI 1.4	▲ VID·HD14	▲ VID·HD14
Network	Ethernet (copper)	■ NET·NET	■ NET·NET
	PoE / PoE+ / PoE++	■ NET·PoE	■ NET·PoE
IR	IR emitter (flasher)	✚ CTL·IR	✚ CTL·IR
	IR receiver (powered eye)	✚ CTL·IRRX	✚ CTL·IRRX
	IR direct (device input)	✚ CTL·IRD	✚ CTL·IRD
RS-232	RS-232	✚ CTL·232	✚ CTL·232
RG6	RF / CATV distribution	▽ RF·RF	▽ RF·RF
	Satellite / SWM	▽ RF·SAT	▽ RF·SAT
	OTA antenna	▽ RF·OTA	▽ RF·OTA
S/PDIF	S/PDIF, coaxial (75 Ω)	◆ DIG·SPD	◆ DIG·SPD
TOSLINK	TOSLINK (optical S/PDIF)	◇ DIG·OPT	◇ DIG·OPT
Speaker level	Speaker level, low-Z	◖ AUD·SPK	◖ AUD·SPK
	Speaker, constant-voltage 70 / 100 / 25 V	○ AUD·70V	○ AUD·70V
Power	AC branch circuit	⬢ PWR·PWR	⬢ PWR·PWR
	IEC device power (C13/C14, C19/C20)	⬢ PWR·IEC	⬢ PWR·IEC

SYMBOLS

- Switcher
- Amplifier
- Patch panel
- Blank or vent
- Extender
- Processor
- Power
- Shelf

DEVICE BLOCK

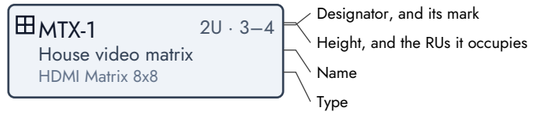

An example block, not a device in this project.

CONVENTIONS

- Border: NEW
- Hatched: a blank, vent or shelf
- 2U · 3–4 — Height, and the RUs a device occupies
- 176.6 lb — Load gutter: weight carried from this RU up

IDENTIFIERS

Device	{TYPE_PREFIX}{SEP}{SEQ} → AMP-1
	TYPE_PREFIX = AMP, prefix of the device type
	SEP = -, separator
	SEQ = 1, sequence number
Port	J{PORT_SEQ:2} → J03
	PORT_SEQ = 3, port sequence on the device
Cable	W{SEQ:3} → W001
	SEQ = 1, sequence number
Outlet, field end	{ROOM_ABBR}-{SERVICE}-{SEQ} → LR-TV-1
	ROOM_ABBR = LR, room abbreviation
	SERVICE = TV, service at the outlet
	SEQ = 1, sequence number
Outlet, rack end	{FLOOR}{SPACE}-{PANEL}{PORT:2} → 1A-A12
	FLOOR = 1, floor
	SPACE = A, space on the floor
	PANEL = A, patch panel letter
	PORT = 12, panel port number

ABBREVIATIONS AND NOTES

RU	rack unit, 1.75 in
NTS	not to scale
REV	revision
CHK'D	checked by
DISC	discipline
PROJ	project number
AUD	Analog Audio (a tag prefix)
CTL	Control (a tag prefix)
DIG	Digital Audio (a tag prefix)
NET	Network (a tag prefix)
PWR	Power (a tag prefix)
RF	Analog Video & RF (a tag prefix)
STR	Structure (a tag prefix)
VID	Digital Video (a tag prefix)

Do not scale a sheet marked NTS.

A value shown as — is not known, and was not guessed.

REV	DATE	DESCRIPTION	BY
A	2026-05-06	Issued for construction	RackPal

Small Office

400 Example Boulevard, Suite 210, Sampleton, CA 90000, US

CLIENT Sample Tenant Co.

SYMBOL LEGEND

DRAWN	RackPal	SCALE	NTS	SIZE	B	DATE	2026-07-18	REV	A
CHK'D	—	PROJ	RM-2026-031	DISC	T	FILE	small_office.rppj	SHEET	T0.01

Example Integration Co.

PROJECT-WIDE EXCEPTIONS (0)

RULE	CHANGE	REASON	BY	DATE

None. Every rule runs at its catalogue severity, and none is muted.

OPEN FINDINGS (5)

SEVERITY	RULE	LOCUS	MESSAGE
WARNING (5)			
WARNING	RCK-013	SW-1	SW-1 is 7.7 kg on front ears rated to 7.0 kg. It needs rear rail support or a shelf in RK-1, and may require adjustment of the rack ears.
WARNING	RCK-013	AMP-1	AMP-1 is 12.7 kg on front ears rated to 7.0 kg. It needs rear rail support or a shelf in RK-1, and may require adjustment of the rack ears.
WARNING	RCK-013	SEQ-1	SEQ-1 is 8.2 kg on front ears rated to 7.0 kg. It needs rear rail support or a shelf in RK-1, and may require adjustment of the rack ears.
WARNING	RCK-013	SW-3	SW-3 is 7.7 kg on front ears rated to 7.0 kg. It needs rear rail support or a shelf in RK-2, and may require adjustment of the rack ears.
WARNING	RCK-013	SEQ-2	SEQ-2 is 8.2 kg on front ears rated to 7.0 kg. It needs rear rail support or a shelf in RK-2, and may require adjustment of the rack ears.

ACKNOWLEDGED FINDINGS (0)

SEVERITY	RULE	LOCUS	MESSAGE	REASON	BY	DATE

None.

REV	DATE	DESCRIPTION	BY
A	2026-05-06	Issued for construction	RackPal

Small Office

400 Example Boulevard, Suite 210, Sampleton, CA 90000, US

CLIENT Sample Tenant Co.

EXCEPTIONS AND ACKNOWLEDGEMENTS

DRAWN	RackPal	SCALE	NTS	SIZE	B	DATE	2026-07-18	REV	A
CHK'D	—	PROJ	RM-2026-031	DISC	T	FILE	small_office.rppj	SHEET	T0.02

Example Integration Co. SYMBOL LEGEND: SEE SHEET T0.01

SCALE APPLIES TO THE MOUNTING PANEL. RULER AND GUTTER ARE ANNOTATION.
RACK GROUND BAR PRESENT. BOND TO BUILDING GROUND PER LOCAL CODE.

RACK TOTAL 140.3 lb
CAPACITY 881.8 lb
DRAW ≥ 1436 VA (3 unknown)
HEAT ≥ 4211 BTU/hr (2 unknown)
NOT DRAWN HERE 1 OF 16 — SEE T6.30; 3 COUNTED AT TOP

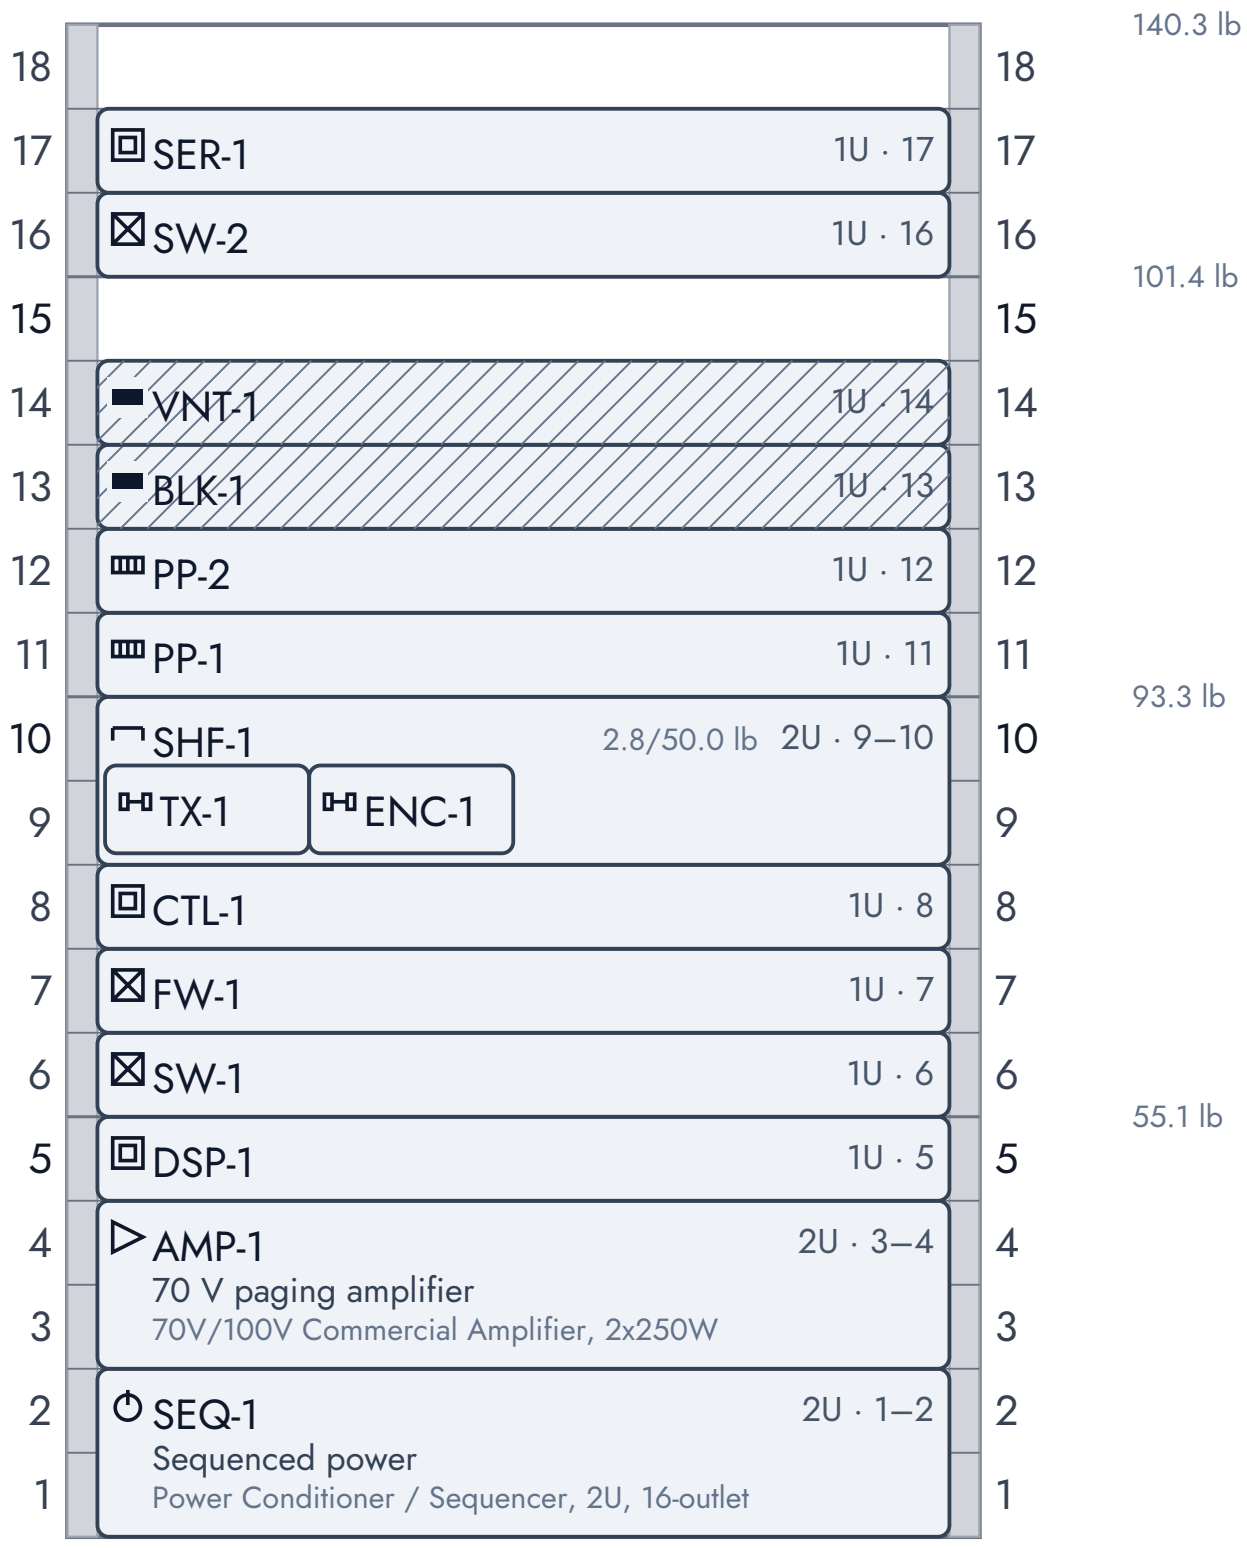

1 ft

REV	DATE	DESCRIPTION	BY
A	2026-05-06	Issued for construction	RackPal

Small Office — RK-1 Server Room Rack

400 Example Boulevard, Suite 210, Sampleton, CA 90000, US

CLIENT Sample Tenant Co.

RACK ELEVATION — FRONT

RK-1 · Server Room Rack · 18U

DRAWN	RackPal	SCALE	1:4	SIZE	B	DATE	2026-07-18	REV	A
CHK'D	—	PROJ	RM-2026-031	DISC	T	FILE	small_office.rppj	SHEET	T2.01

Example Integration Co.

SYMBOL LEGEND: SEE SHEET T0.01

SHEET T2.01 · RACK ELEVATION — FRONT

SHEET NO. T2.01

REAR FACES SHOWN. PORT AND CONNECTION DETAIL: SEE T6.15.
REAR VIEW — MIRRORED
SCALE APPLIES TO THE MOUNTING PANEL. RULER AND GUTTER ARE ANNOTATION.
RACK GROUND BAR PRESENT. BOND TO BUILDING GROUND PER LOCAL CODE.

RACK TOTAL 140.3 lb
CAPACITY 881.8 lb
DRAW ≥ 1436 VA (3 unknown)
HEAT ≥ 4211 BTU/hr (2 unknown)
NOT DRAWN HERE 8 OF 16 — 7 ON FRONT, 1 ONLY ON T6.30; 3 COUNTED AT TOP

1 ft

REV	DATE	DESCRIPTION	BY
A	2026-05-06	Issued for construction	RackPal

Small Office — RK-1 Server Room Rack

400 Example Boulevard, Suite 210, Sampleton, CA 90000, US

CLIENT Sample Tenant Co.

RACK ELEVATION — REAR

RK-1 · Server Room Rack · 18U

DRAWN	RackPal	SCALE	1:4	SIZE	B	DATE	2026-07-18	REV	A
CHK'D	—	PROJ	RM-2026-031	DISC	T	FILE	small_office.rppj	SHEET	T2.02

Example Integration Co.

SYMBOL LEGEND: SEE SHEET T0.01

SHEET T2.02 · RACK ELEVATION — REAR

SHEET NO. T2.02

SCALE APPLIES TO THE MOUNTING PANEL. RULER AND GUTTER ARE ANNOTATION.

RACK TOTAL 39.1 lb
CAPACITY 99.2 lb
DRAW ≥ 412 VA (1 unknown)
HEAT ≥ 1338 BTU/hr (1 unknown)

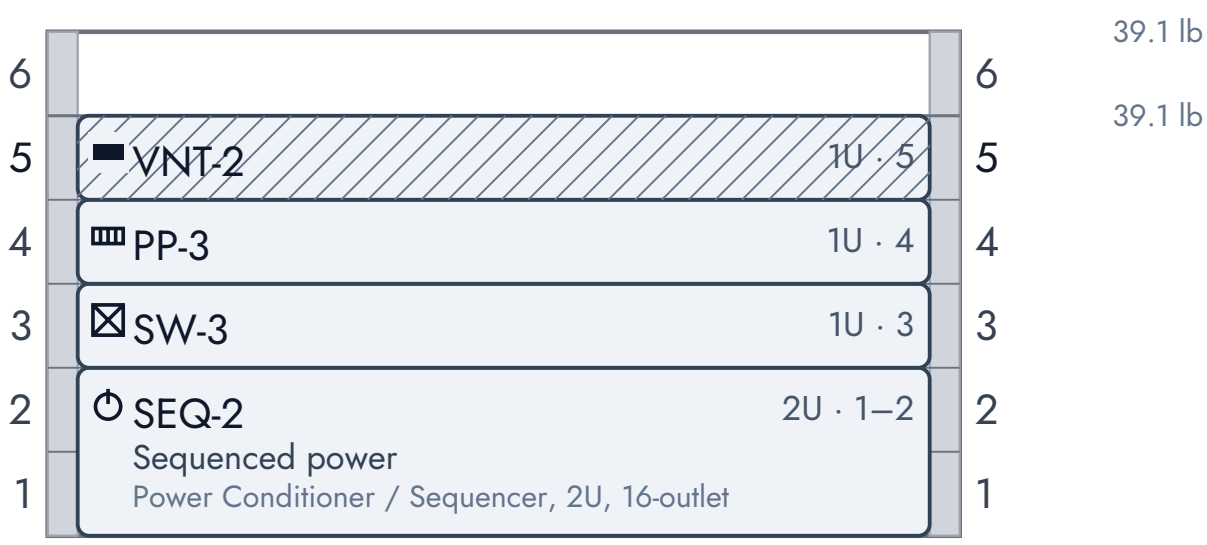

REV	DATE	DESCRIPTION	BY
A	2026-05-06	Issued for construction	RackPal

Small Office — RK-2 Reception Wall Box

400 Example Boulevard, Suite 210, Sampleton, CA 90000, US

CLIENT Sample Tenant Co.

RACK ELEVATION — FRONT

RK-2 · Reception Wall Box · 6U

DRAWN	RackPal	SCALE	1:4	SIZE	B	DATE	2026-07-18	REV	A
CHK'D	—	PROJ	RM-2026-031	DISC	T	FILE	small_office.rppj	SHEET	T2.03

Example Integration Co.

SYMBOL LEGEND: SEE SHEET T0.01

SHEET T2.03 · RACK ELEVATION — FRONT

SHEET NO. T2.03

REAR FACES SHOWN. PORT AND CONNECTION DETAIL: SEE T6.15.
REAR VIEW — MIRRORED
SCALE APPLIES TO THE MOUNTING PANEL. RULER AND GUTTER ARE ANNOTATION.

RACK TOTAL 39.1 lb
CAPACITY 99.2 lb
DRAW ≥ 412 VA (1 unknown)
HEAT ≥ 1338 BTU/hr (1 unknown)
NOT DRAWN HERE 2 OF 4 — 2 ON FRONT

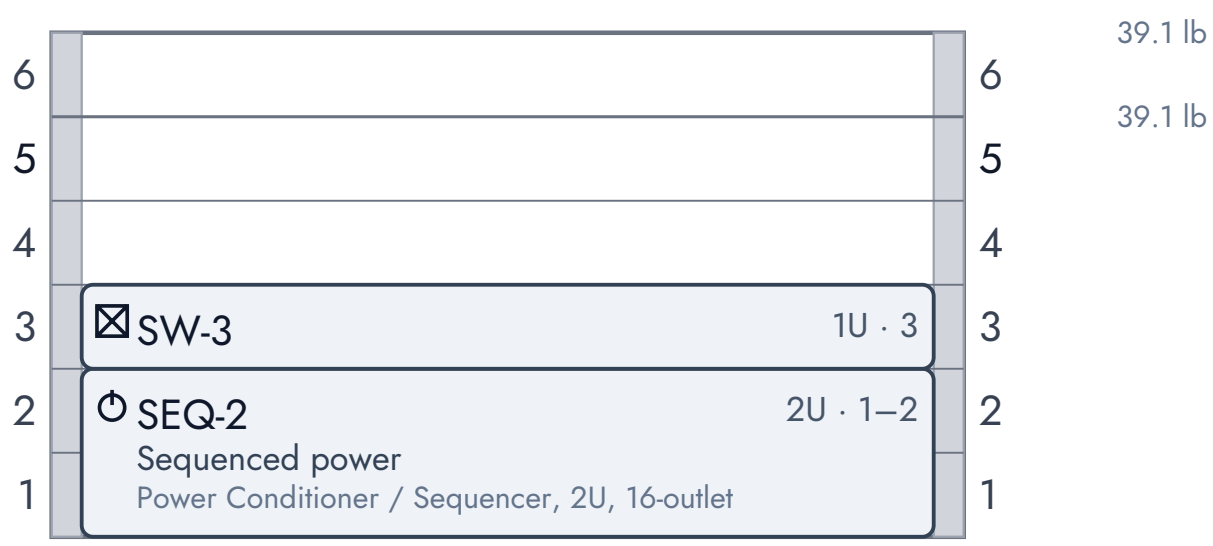

REV	DATE	DESCRIPTION	BY
A	2026-05-06	Issued for construction	RackPal

Small Office — RK-2 Reception Wall Box

400 Example Boulevard, Suite 210, Sampleton, CA 90000, US

CLIENT Sample Tenant Co.

RACK ELEVATION — REAR

RK-2 · Reception Wall Box · 6U

DRAWN	RackPal	SCALE	1:4	SIZE	B	DATE	2026-07-18	REV	A
CHK'D	—	PROJ	RM-2026-031	DISC	T	FILE	small_office.rppj	SHEET	T2.04

Example Integration Co.

SYMBOL LEGEND: SEE SHEET T0.01

SHEET T2.04 · RACK ELEVATION — REAR

SHEET NO. T2.04

PULL SHEET (0 runs)

CABLE ID	TYPE	FIELD LABEL	RACK LABEL	FROM — ROOM / OUTLET	TO — RACK / RU / FACE	MEDIA	LEN	PATHW…	SIGN-OFF

This project has no cables yet.

TERMINATION SCHEDULE (0 runs)

CABLE ID	TYPE	RACK LABEL	FIELD LABEL	RACK / RU / FACE	DEVICE	PORT	FAR END	FAR PORT	MEDIA	FIELD TERM	RACK TERM	CONDUCT... / NOTES

This project has no cables yet.

EQUIPMENT AND RACK MATERIALS. CABLE SCHEDULES: SEE T6.10 AND T6.15. POWER SCHEDULE NOT ISSUED IN THIS SET. 11 DEVICES NOT IN A RACK.

QTY	DESIGNATOR	MANUFACTURER	MODEL	DESCRIPTION	RU	RACK	LOCATION	FACE	MASS (LB)	DRAW (VA)	LIFECYCLE	NOTES
RK-1 · Server Room Rack · 18U												
1	SER-1	Generic	SER-IP-8	Serial gateway, rear-mounted	1U · 17	RK-1	Server Room	REAR	5.1	16	NEW	
1	SW-2	Generic	SW-48-POE	Edge switch, rear-mounted	1U · 16	RK-1	Server Room	REAR	17.0	400	NEW	
1	PP-2	Generic	PP-24	Boardroom patch panel	1U · 12	RK-1	Server Room	FRONT	3.1	—	NEW	
1	PP-1	Generic	PP-24	Open plan patch panel	1U · 11	RK-1	Server Room	FRONT	3.1	—	NEW	
1	CTL-1	Generic	CTL-PROC-1	Room control processor	1U · 8	RK-1	Server Room	FRONT	7.1	32	NEW	
1	FW-1	Generic	FW-RTR-1	Router / firewall	1U · 7	RK-1	Server Room	FRONT	9.0	58	NEW	
1	SW-1	Generic	SW-48-POE	Core switch	1U · 6	RK-1	Server Room	FRONT	17.0	400	NEW	
1	DSP-1	Generic	DSP-8X8-DANTE	Paging and BGM processor	1U · 5	RK-1	Server Room	FRONT	9.0	37	NEW	
1	AMP-1	Generic	AMP-70V-2X250	70 V paging amplifier	2U · 3–4	RK-1	Server Room	FRONT	28.0	462	NEW	
1	SEQ-1	Generic	SEQ-2U-16	Sequenced power	2U · 1–2	RK-1	Server Room	FRONT	18.1	12	NEW	
1	TX-1	Generic	TX-HDBT-1	Boardroom HDBaseT transmitter	—	RK-1	Server Room	SHELF	1.2	9	NEW	
1	ENC-1	Generic	ENC-AVOIP-1	Reception AVoIP encoder	—	RK-1	Server Room	SHELF	1.5	—	NEW	
1	PDU-1	Generic	PDU-0U-24	Rear PDU	0U	RK-1	Server Room	0U	14.1	10	NEW	
							RK-1 SUBTOTAL	13 DEVICES + 3 PASSIVES (SEE MATERIALS)			140.3 lb	≥ 1436 VA (3 unknown)
RK-2 · Reception Wall Box · 6U												
1	PP-3	Generic	PP-24	Reception patch panel	1U · 4	RK-2	Reception	FRONT	3.1	—	NEW	
1	SW-3	Generic	SW-48-POE	Reception switch	1U · 3	RK-2	Reception	FRONT	17.0	400	NEW	
1	SEQ-2	Generic	SEQ-2U-16	Sequenced power	2U · 1–2	RK-2	Reception	FRONT	18.1	12	NEW	
							RK-2 SUBTOTAL	3 DEVICES + 1 PASSIVE (SEE MATERIALS)			39.1 lb	≥ 412 VA (1 unknown)
NOT IN A RACK												
1	DISP-1	Generic	DISP-1	Boardroom display	—	—	Boardroom	NONE	39.9	126	NEW	
1	DISP-2	Generic	DISP-1	Reception display	—	—	Reception	NONE	39.9	126	NEW	
1	SPK-1	Generic	SPK-70V-PENDANT	Open plan pendant, north	—	—	Open Plan	NONE	5.1	—	NEW	
1	SPK-2	Generic	SPK-70V-PENDANT	Open plan pendant, centre	—	—	Open Plan	NONE	5.1	—	NEW	
1	SPK-3	Generic	SPK-70V-PENDANT	Open plan pendant, south	—	—	Open Plan	NONE	5.1	—	NEW	
1	SPK-4	Generic	SPK-70V-PENDANT	Reception pendant	—	—	Reception	NONE	5.1	—	NEW	
1	AP-1	Generic	AP-1	Open plan access point	—	—	Open Plan	NONE	2.0	—	NEW	
1	AP-2	Generic	AP-1	Boardroom access point	—	—	Boardroom	NONE	2.0	—	NEW	
1	TP-1	Generic	TP-1	Boardroom touchpanel	—	—	Boardroom	NONE	3.1	—	NEW	
1	CAM-1	Generic	CAM-IP-1	Reception camera	—	—	Reception	NONE	1.5	—	NEW	
1	ONT-1	Generic	ONT-1	Carrier handoff	—	—	Server Room	NONE	2.4	—	NEW	
								NOT IN A RACK SUBTOTAL		11 DEVICES	111.1 lb	≥ 252 VA (9 unknown)
MATERIALS												
1		Generic	BLK-1U	Blank Panel, 1U	RK-1 × 1				1.0	0	NEW	
1		Generic	SHF-2U	Rack Shelf, 2U, vented	RK-1 × 1				5.1	0	NEW	

Small Office

SYMBOL LEGEND: SEE SHEET T0.01

EQUIPMENT LIST AND MATERIALS

400 Example Boulevard, Suite 210, Sampleton, CA 90000, US · CLIENT Sample Tenant Co. · Example Integration Co.

SHEET T6.30

DRAWN RackPal · SCALE NTS · SIZE A · DATE 2026-07-18 · REV A · CHK'D — · PROJ RM-2026-031 · DISC T · FILE small_office.rppj

SHEET NO. T6.30

EQUIPMENT AND RACK MATERIALS. CABLE SCHEDULES: SEE T6.10 AND T6.15. POWER SCHEDULE NOT ISSUED IN THIS SET. 11 DEVICES NOT IN A RACK.

QTY	DESIGNATOR	MANUFACTURER	MODEL	DESCRIPTION	RU	RACK	LOCATION	FACE	MASS (LB)	DRAW (VA)	LIFECYCLE	NOTES
MATERIALS (cont.)												
2		Generic	VNT-1U	Vent Panel, 1U, 64% open	RK-1 × 1, RK-2 × 1				2.0	0	NEW	

CABLE FOOTAGE BY MEDIA

MEDIA	RUNS	ESTIMATED	LENGTH UNKNOWN	FOOTAGE	WITH WASTE (+10%)

NO FIELD CABLE IN THIS PROJECT.

HARDWARE IMPLIED BY THE RULES

QTY	ITEM	FOR	RACK	RULE	NOTES
1	Rear rail support	AMP-1	RK-1	RCK-013	
1	Rear rail support	SEQ-1	RK-1	RCK-013	
1	Rear rail support	SW-1	RK-1	RCK-013	
1	Rear rail support	SEQ-2	RK-2	RCK-013	
1	Rear rail support	SW-3	RK-2	RCK-013	

JUMPERS AND POWER CORDS

QTY	MEDIA	LENGTH	COLOUR	NOTES

NO JUMPERS OR POWER CORDS IN THIS PROJECT.

IN-LINE ADAPTERS

QTY	ADAPTER	MODEL

NO IN-LINE ADAPTER IS DECLARED.

OUTLET MAP

PROVIDER	OUTLET	DEVICE	INLET	CORD	RACK

NO CORD IS DRAWN TO AN OUTLET.

PDU-1: 0 of 24 outlets assigned, 24 free.

SEQ-1: 0 of 16 outlets assigned, 16 free.

SEQ-2: 0 of 16 outlets assigned, 16 free.

20 devices have no cord drawn and are counted as one outlet per inlet.